


A PRINTER TO FORM A PARTNERSHIP WITH.

This effective printer is so reliable that you can install it and simply forget about it. A pure desktop device that takes a mere 6 seconds to output the first page, you can trust it to deliver high-quality printing without interruption. No matter how busy you are, you can rely on the FS-1100 to get things done.

- 28 pages per minute with 1,200 dpi resolution
- Max. paper capacity of up to 500 sheets (incl. option)
- Compact design, robust and reliable
- Powerful controller with 32MB RAM as standard
- Long-life components

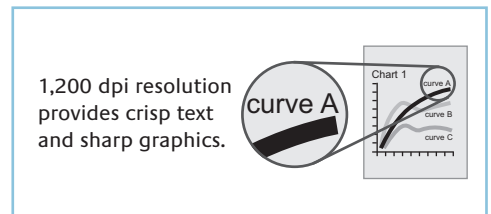

FS-1100

A4 MONOCHROME DESKTOP PRINTER

ECOSYS With their long-life components, ECOSYS devices are designed to maximise durability and minimise the total cost of ownership with regard to maintenance, administration and consumables. The cartridge-free system means that only the toner has to be replaced. The modular design concept allows you to add workflow-enhancing functions as required. Integrated system software provides long-term cross-network compatibility. Kyocera's long-life components cost you and the environment less.

System platform:

The FS-1100 offers USB connectivity as standard and delivers optional network connectivity and problem-free system administration. Kyocera's single platform technology means that the same driver can be used for every Kyocera PCL/PostScript print device on the network; from single-user desktop printers to high-end multifunctional systems. Only Kyocera offers this effortless IT sophistication.

PRESCRIBE II:

With the Kyocera page design and control language PRESCRIBE II, even complex graphics, logos and forms (even multipart forms) can be created independently of the system and saved and updated in the printer. Consequently, integration into print files no longer applies. They are only accessed as required and therefore relieve the load on the network.

Status Monitor/KM-NET Viewer:

The settings of the FS-1100 can be checked visually and amended from any Windows PC, while the Status Monitor ensures easy setup and checking of the printer status via a USB connection. KM-NET Viewer is an advanced printer management software tool using the standardised protocol SNMP.

GENERAL

Technology: Kyocera ECOSYS, Laser
Engine speed: Up to 28 pages per minute A4
Resolution: 1,200 x 1,200 dpi
Time to first page: 6 seconds or less
Warm-up time: 19 seconds
Duty cycle: Max. 20,000 pages per month, average 2,000 pages per month
Power source: AC 220 ~ 240 V, 50/60 Hz
Power consumption: Printing: 439 W, Stand-by: 8.3 W, Power-Saving (ECOpower): 4.4 W
Noise (ISO 7779): Printing: 53 dB(A), Stand-by: 30 dB(A), Power-Saving (ECOpower): Immeasurably low
Dimensions (W x D x H): Main unit: 375 x 393 x 250 mm
Weight: Main unit incl. toner: Approx. 10 kg
Certifications: TÜV/GS, CE, PTS
This product is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard.

PAPER HANDLING

All paper capacities quoted are based on a paper weight of 80 g/m². Please use paper recommended by Kyocera under normal environmental conditions.

Input capacity: 250-sheet universal paper cassette, 60-120g/m², A4, A5, A6, B5, Letter, Legal, Custom (105 x 148 mm to 215.9 x 297 mm)
1-sheet manual feed, 60-220g/m², A4, A5, A6, B5, Letter, Custom (70 x 148 mm to 215.9 x 356 mm)
Max. input capacity with optional paper feeder PF-100: 501 sheets
Manual duplex supported
Output capacity: 250 sheets face-down

CONTROLLER

Processor: PowerPC 405F5 / 360MHz
Memory: Standard 32MB + ECOMemory, max. 544MB in 1 DDR SDRAM DIMM slot
Emulations: PCL6/PCL5e incl. P.JL, KPDL 3 (PostScript 3 compatible) with automatic emulation sensing (AES), Line Printer, IBM Proprinter X24E, Epson LQ-850, Diablo 630
Controller language: PRESCRIBE II
Fonts: 80 outline fonts accessible in all emulations, 1 bitmap font, 45 types of one-dimensional barcodes plus two-dimensional barcode PDF-417, Downloadable fonts: Kyocera, PCL + TrueType format, Type 1 + 3 format

INTERFACES

Standard interface: USB 2.0 (Hi-Speed), KUIO-LV interface slot

OPTIONS

Paper handling
PF-100 Paper feeder (max. 1 unit): 250 sheets, 60-120g/m², A4, A5, A6, B5, Letter, Legal, Custom (148 x 210 mm to 215.9 x 297 mm)
CB-100 Cabinet: Wooden desk with storage capacity, including castors (wheels)

Memory
Printer memory: 1 DDR SDRAM DIMM slot (64, 128, 256, 512MB)
CompactFlash® memory card type 1: 1 slot up to 2GB, forms, fonts, logos, macro storage

Optional interface
IB-23 Network card: 10Base-T/100Base-TX
PS159: Wireless LAN (802.11b/g)
PS1109 Gigabit Ethernet: 10BaseT / 100BaseTX / 1000BaseT (RJ-45)
PS129 Fibre Optic: 100BaseSX (SC)
PS1129 Gigabit Fibre Optic: 1000BaseSX (SC)

CONSUMABLES

TK-140 Toner-kit: Microfine toner for 4,000 pages in accordance with ISO/IEC 19752*

*Capacity of starter toner is 2,000 pages in accordance with ISO/IEC 19752

WARRANTY

2-year warranty as standard. Kyocera guarantees the drum and developer for 3 years or 100,000 pages (whichever occurs sooner), provided each printer is used and cleaned in accordance with the service instructions.

KYO LIFE 3-year on-site warranty for printer and options.

MODEL CONFIGURATIONS

FS-1100N: Incl. integrated IB-23 Network card



Select your options to suit your needs:



PF-100 Paper feeder

Product depicted includes optional extras

Your Kyocera Business Partner:

KYOCERA MITA Europe B.V., Hoeksteen 40, 2132 MS Hoofddorp, The Netherlands, Tel +31 (0) 20 65 40 000, Fax +31 (0) 20 65 31 256, www.kyoceramita-europe.com, info@kyoceramita-europe.com
KYOCERA MITA Corporation, 2-28, 1-Chome, Tamatsukuri, Chuo-Ku, Osaka 540-8585, Japan, www.kyoceramita.com

Kyocera does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

 **KYOCERA**